CS251 Fall 2026

(cs251.stanford.edu)

# Incentives and Accountability in Consensus: Proof-of-Stake

# Recap: Security for SMR

Let $LOG_t^i$ denote the log learned by a client $i$ at time $t$.

Then, a **secure** SMR protocol satisfies the following guarantees:

**Safety (Consistency):**

- For any two clients $i$ and $j$, and times $t$ and $s$: either $LOG_t^i \preccurlyeq LOG_s^j$ is true or $LOG_s^j \preccurlyeq LOG_t^i$ is true or both (Logs are consistent).

**Liveness:**

- If a transaction $tx$ is input to an honest replica at some time $t$, then for all clients $i$, and times $s \geq t + T_{conf}$: $tx \in LOG_s^i$.

No double spend

No censorship

# Recap of the Last Lecture

**Sybil Attack**: adversary pretends to be many nodes to outnumber honest nodes.

- Sybil Resistance: Proof-of-Work, Proof-of-Stake, or Proof-of-Space.

Bitcoin and **Nakamoto Consensus:**

- Longest (heaviest) chain rule and $k$-deep confirmation rule
- Sybil resistance and dynamic availability (liveness under changing participation)

**Security for Bitcoin**: Nakamoto's private attack and forking

- Thm (informal): In a synchronous network,

  mining rate $\lambda$ is sufficiently low $\Rightarrow$ Nakamoto consensus is safe when $\beta < \frac{1}{2}$

# Incentives in Bitcoin

How does Bitcoin *incentivize* miners to participate in consensus and mine new blocks?

- Block rewards – currently 3.125 Bitcoin – halved every 210,000 blocks (≈4 years)
- Transaction fees

Do these *incentives* guarantee *honest* participation?

- Not necessarily!
- Example: selfish mining attack

(see section and the optional slides for the details.)

# From Bitcoin to Proof-of-Stake

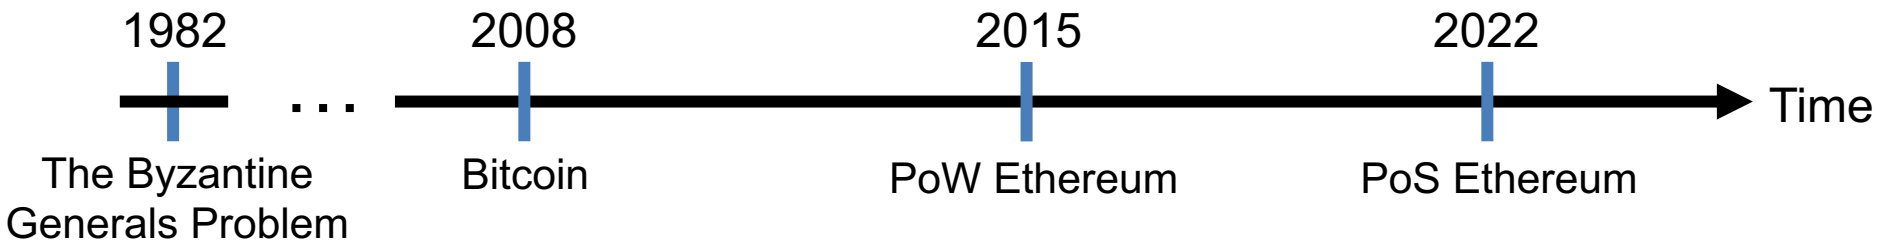


Consensus in the Internet Setting
- Sybil resistance
- Dynamic availability
  - (Liveness under changing part.)

Block rewards (carrot)
- ➢ to incentivize participation!

- ➢ Consensus in the Internet Setting
  - ➢ Sybil resistance
  - ➢ Dynamic availability
- ➢ Block rewards (carrot)
- ➢ Finality and accountable safety
- ➢ Slashing (stick)
  - ➢ to punish protocol violation!


The Byzantine Generals Problem (1982)
Bitcoin: A Peer-to-Peer Electronic Cash System (2008)
Ethereum: A Next-Generation Smart Contract and Decentralized Application Platform. (2015)
Combining GHOST and Casper (2020)

# Proof-of-Stake (PoS): introduction

In a Proof-of-Stake protocol, nodes lock up (i.e., stake) their coins in the protocol to become eligible to participate in consensus.

The more coins staked by a node…

- Higher the probability that the node is elected as a leader.
- Leader collects block rewards, a form of interest on locked stake

If a node is caught doing an adversarial action (e.g., certifying two blocks), it can be punished by burning its locked coins (stake)! This is called *slashing*.

Thus, in a Proof-of-Stake protocol, nodes can be held *accountable* for their actions (unlike in Bitcoin, where nodes do not lock up coins).

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{2}{3}$ **of total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{2}{3}$ of total number of nodes $(n)$

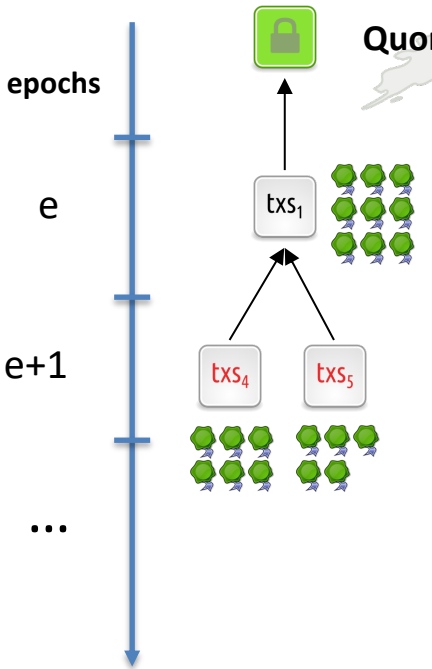

(9 nodes)

Alice's log: $txs_1\ txs_4$

**Vote by a node:** Signature of the node on the block and the epoch

**PBFT: P**ractical **B**yzantine **F**ault **T**olerance. (1999)

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{2}{3}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{2}{3}$ x total number of nodes $(n)$

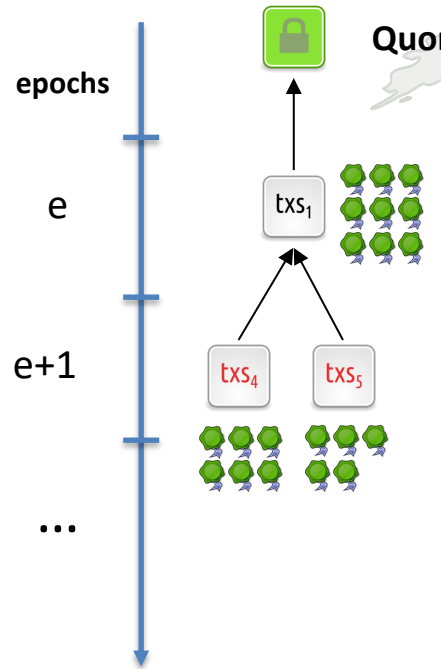


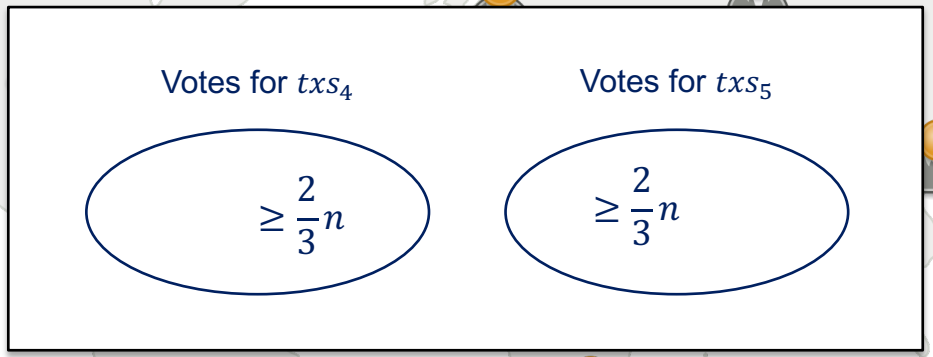

Alice's log: $txs_1\ txs_4$

**Vote by a node:** Signature of the node on the block and the epoch

**PBFT:** **P**ractical **B**yzantine **F**ault **T**olerance. (1999)

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{2}{3}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{2}{3}$ x total number of nodes $(n)$

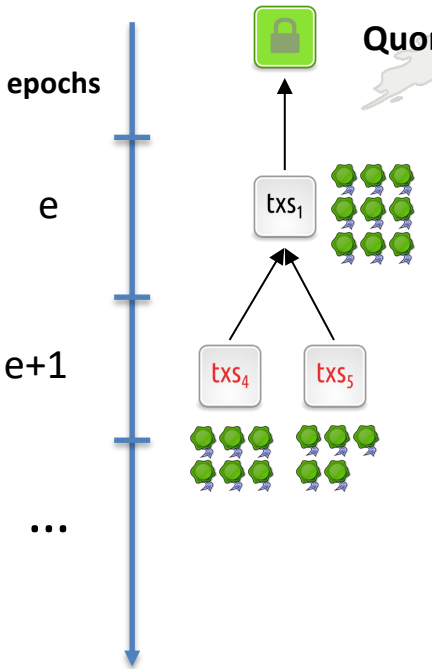


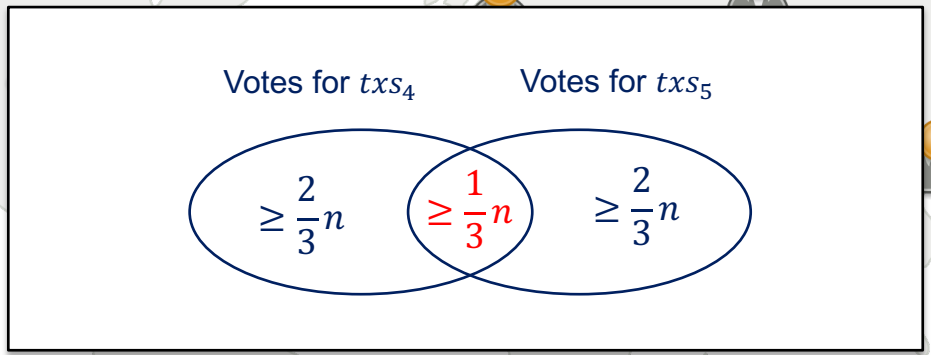

Alice's log: $txs_1\ txs_4$

$\geq \frac{1}{3}n$ of nodes must have voted twice
(once for $txs_4$ and once for $txs_5$)
Therefore, $\geq \frac{1}{3}n$ nodes are adversarial

**Safety when**
**# adversarial nodes** $< \frac{1}{3}$ **n**

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{2}{3}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{2}{3}$ x total number of nodes $(n)$

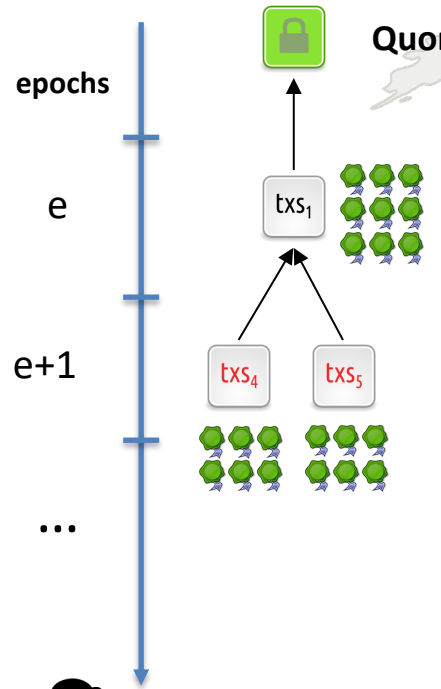

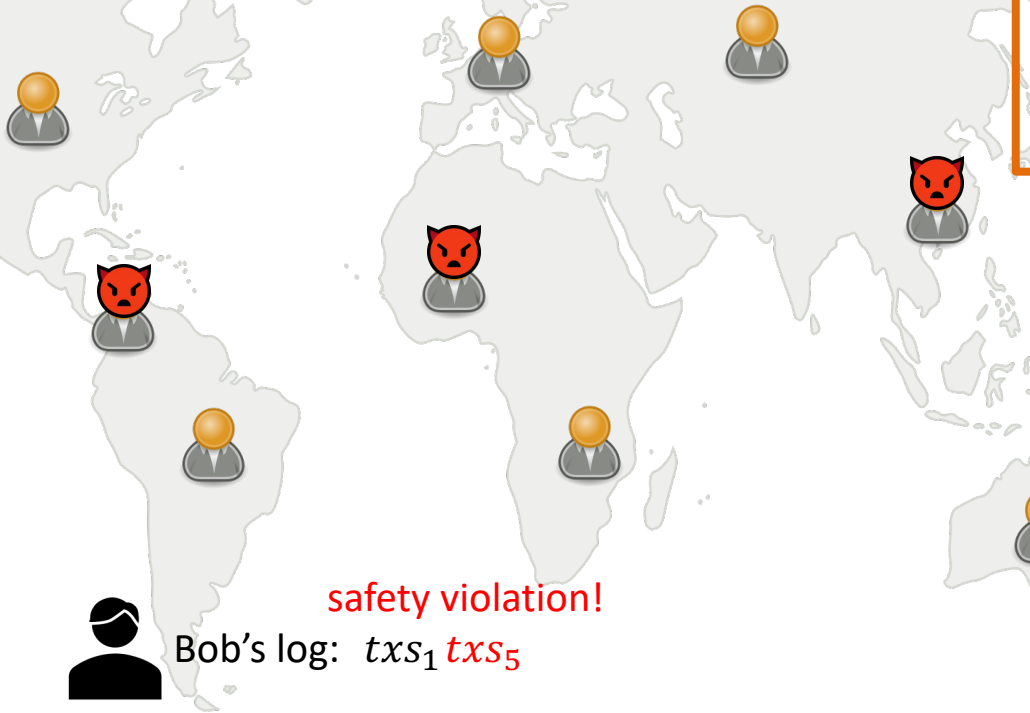

Alice's log: $txs_1\ txs_4$

safety violation!

Bob's log: $txs_1\ txs_5$

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{2}{3}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{2}{3}$ x total number of nodes $(n)$

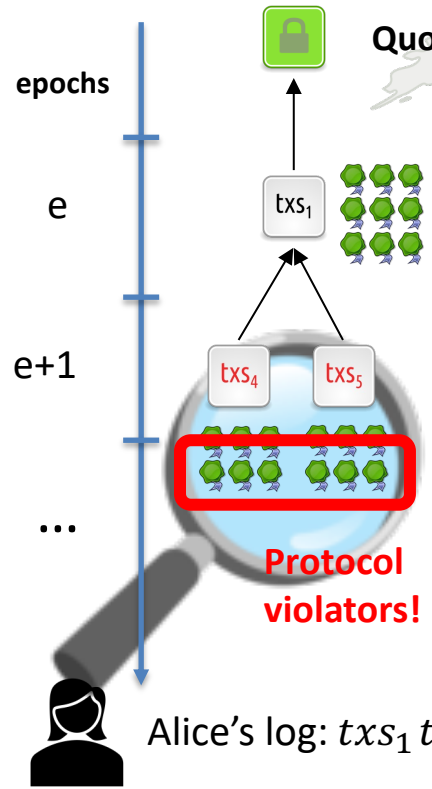

**Safety when # adversarial nodes** $< \frac{1}{3}$ **n**

**Can punish** $\geq \frac{1}{3}$ **n when safety is violated!!**

safety violation!

Alice's log: $txs_1\ txs_4$

Bob's log: $txs_1\ txs_5$

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{7}{9}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{7}{9}$ x total number of nodes $(n)$

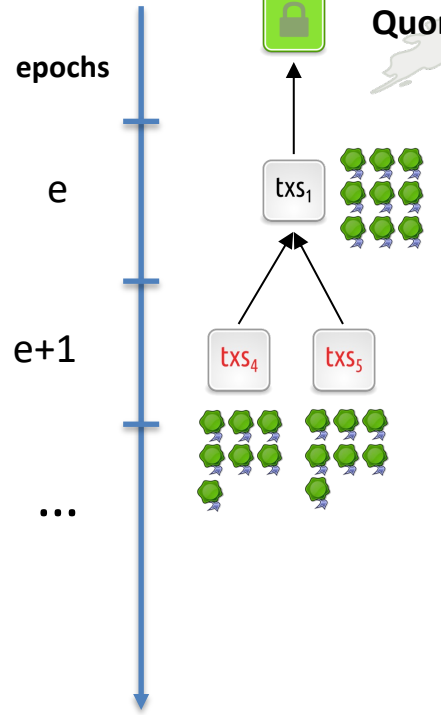

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{7}{9}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{7}{9}$ x total number of nodes $(n)$

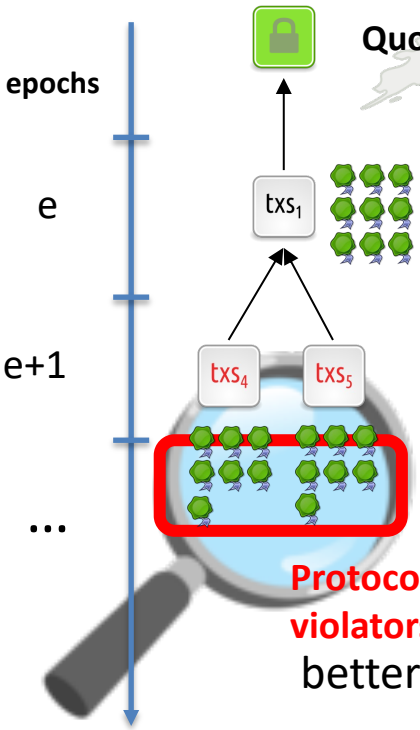

**Safety when # adversarial nodes** $< \frac{5}{9}$ **n**

**Can punish** $\geq \frac{5}{9}$ **n when safety is violated!!**

better safety (up to $(5/9)n$), but what about liveness?

if # crahed nodes > $(2/9)n$ then no liveness !! (no quorum)

# A Simple (PBFT-style) PoS Protocol*

Need votes from $\frac{2}{3}$ **x total number of nodes** $(n)$ for finality:

**Quorum size** = $\frac{2}{3}$ x total number of nodes $(n)$

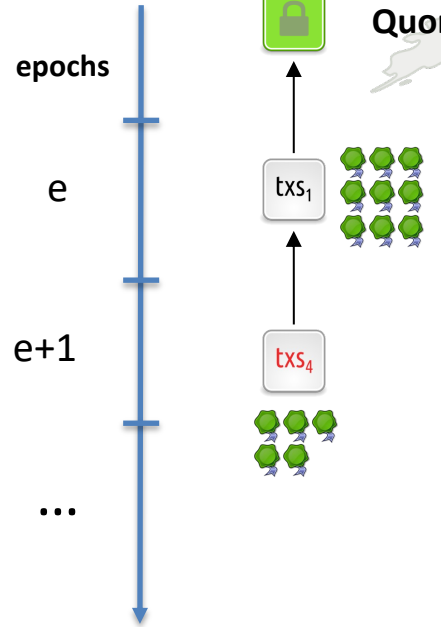

Alice's log: $txs_1$

safe when #adversarial nodes < $n/3$
live when #crashed nodes ≤ $n/3$

**Not live when >$\frac{1}{3}$ of total number of nodes crash**

# A Simple (PBFT-style) PoS Protocol*

- **Sybil resistance mechanism** determines how to select the nodes that are eligible to participate in consensus and propose/vote for transactions/blocks.
- **Consensus protocol** specifies the instructions for honest nodes so that given a set of eligible nodes with sufficiently many being honest, safety and liveness are satisfied.

| Sybil resistance mechanism: Consensus protocol (SMR): | Proof-of-Work | Proof-of-Stake |
|---|---|---|
| **Nakamoto consensus (longest chain)** satisfies dynamic availability | Bitcoin | Ouroboros |
| **PBFT-style (with votes)** satisfies finality and accountable safety | ?? | Ethereum* Simple PBFT-style PoS protocol |

Ouroboros Genesis: Composable Proof-of-Stake Blockchains with Dynamic Availability. (2019)

# Accountable Safety

In a protocol with resilience of *n/3:*

- The protocol is secure (safe & live) if there are less than *n/3* adversarial nodes.
- **Example:** The simple proof-of-stake protocol.

In a protocol with *accountable safety resilience* of *n/3:*

- The protocol is secure if there are less than *n/3* adversarial nodes.
- If there is ever a safety violation, all observers of the protocol can provably identify (i.e., catch) *at least n/3* adversarial nodes as protocol violators.
- No honest node is ever identified (no false accusation).
- **Examples:** The simple proof-of-stake protocol , PBFT, Tendermint, HotStuff …

Casper the Friendly Finality Gadget. (2017)
BFT Protocol Forensics (2021)

# Accountable Safety

Number of adversarial nodes ($f$)

| | | | |
|---|---|---|---|
| **Resilience of n/3** | Safety & Liveness ☺ | No Safety or Liveness ☹ | No Safety or Liveness ☹ |
| **Accountable safety resilience of n/3** | Safety & Liveness ☺ | • No liveness ☹<br>• If safety is violated, catch and punish adversarial nodes ☺ | |

# Finality

- We say that a protocol provides *finality* with resilience $^{n}/_{3}$ if it preserves safety during periods of asynchrony, when there are less than $^{n}/_{3}$ adversarial nodes.
  - **Recall:** under asynchrony, messages can be delayed *arbitrarily* for a finite time.
    - Bitcoin can become unsafe during a period of asynchrony (no finality)
  - **Protocols with finality:** The simple proof-of-stake protocol, PBFT, HotStuff …

    These protocols may halt during periods of asynchrony …

    if not enough votes for a quorum.
- Interestingly, in *most* protocols providing *finality*, transactions can be *finalized* much faster than they can be *confirmed* in Bitcoin
  - No need to wait for k=6 blocks (1 hour)!

# Accountability implies Finality

**Accountability implies Finality:**
**Accountable safety** (with resilience $\frac{n}{3}$) implies **finality** (with resilience $\frac{n}{3}$).

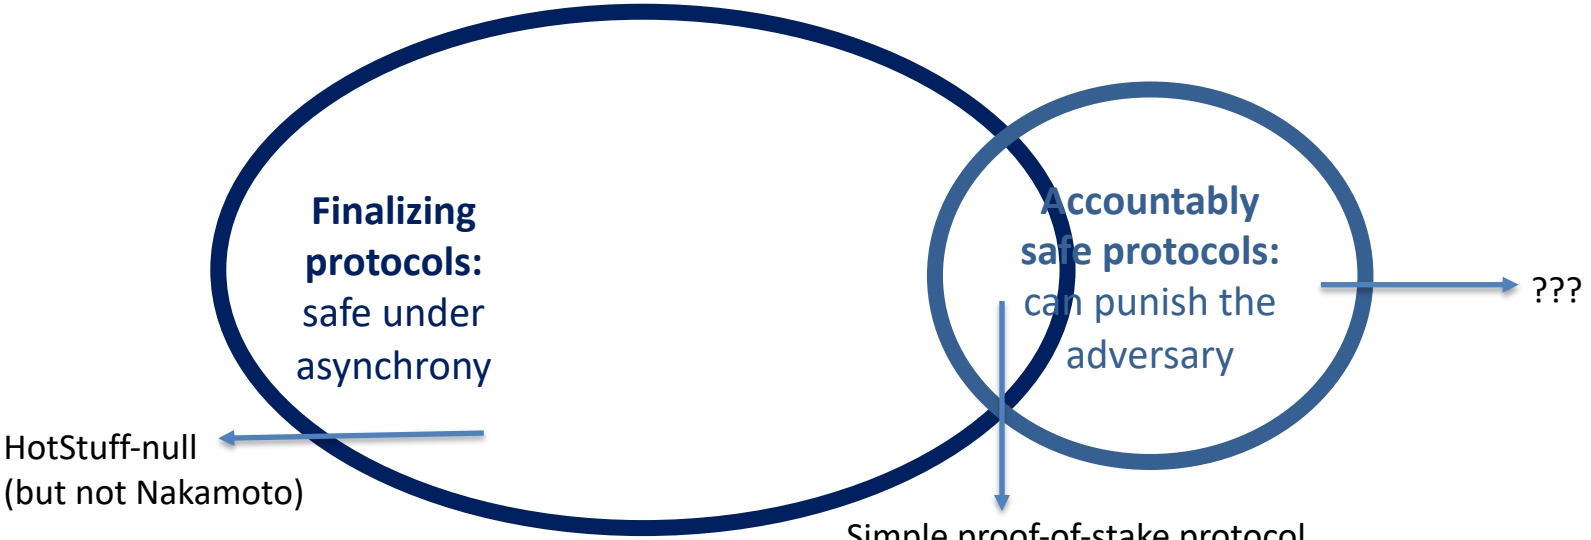


BFT Protocol Forensics (2021)
Accountable Safety Implies Finality (2023)

# Accountability implies Finality

**Accountability implies Finality:**
**Accountable safety** (with resilience $\frac{n}{3}$) implies **finality** (with resilience $\frac{n}{3}$).

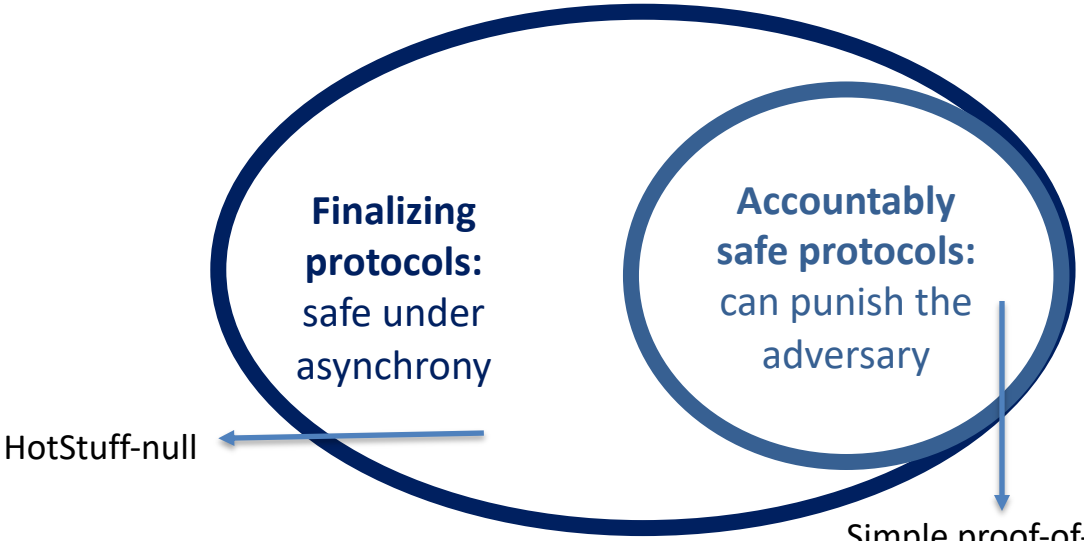


**(Accountable safety:)** if the protocol can punish at least $\frac{n}{3}$ adv. nodes after a safety violation (and is safe when there are less than $\frac{n}{3}$ adv. nodes),

Then **(Finality:)** it must be safe when there are less than $\frac{n}{3}$ adv. nodes even under asynchrony.

BFT Protocol Forensics (2021)
Accountable Safety Implies Finality (2023)

# Holy Grail of Internet Scale Consensus

- We want Sybil resistance: Proof-of-Work or Proof-of-Stake…
- We want dynamic availability so that…
  - Transactions continue to be confirmed even when there is low participation.
  - Satisfied by Nakamoto consensus.
- We want finality and **accountable safety** so that…
  - Finality: There cannot be safety violations (double-spends) during asynchrony.
  - **Accountable safety:** Nodes can be held accountable for safety violations caused by their actions.
  - Satisfied by our simple proof-of-stake protocol, PBFT, HotStuff, …

- Let's focus on having dynamic availability and finality for now…

# Holy Grail of Internet Scale Consensus

Is there a SMR protocol that provides both dynamic availability and finality with any resilience?

**No: The Blockchain CAP Theorem!!**

**CAP: C**onsistency, **A**vailability, **P**artition tolerance

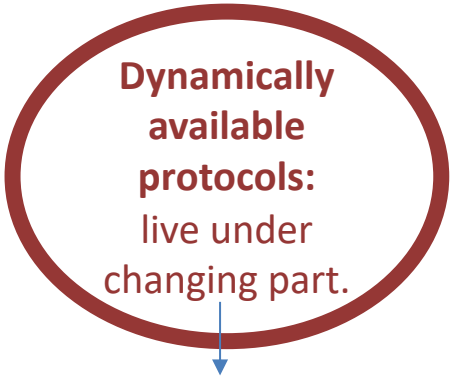


Nakamoto consensus

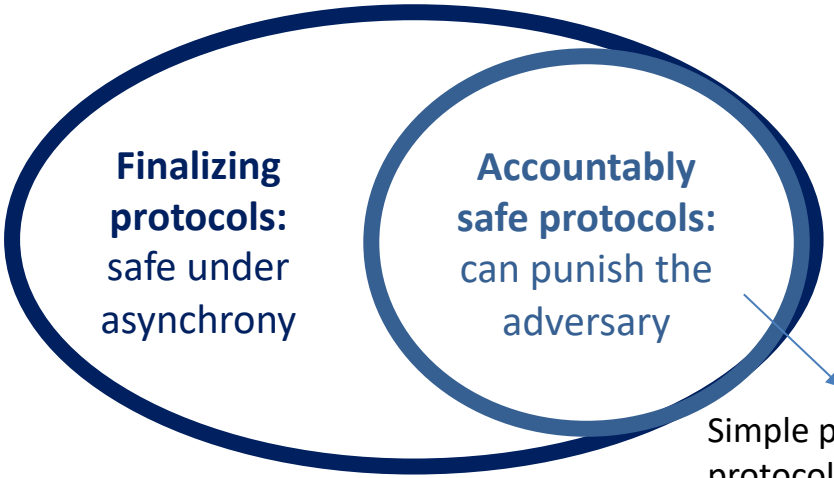


Simple proof-of-stake protocol, PBFT, HotStuff, …

Resource Pools and the CAP Theorem (2020)

# Blockchain CAP Theorem

For contradiction, suppose our SMR protocol has both dynamic availability and finality.

**World 1**

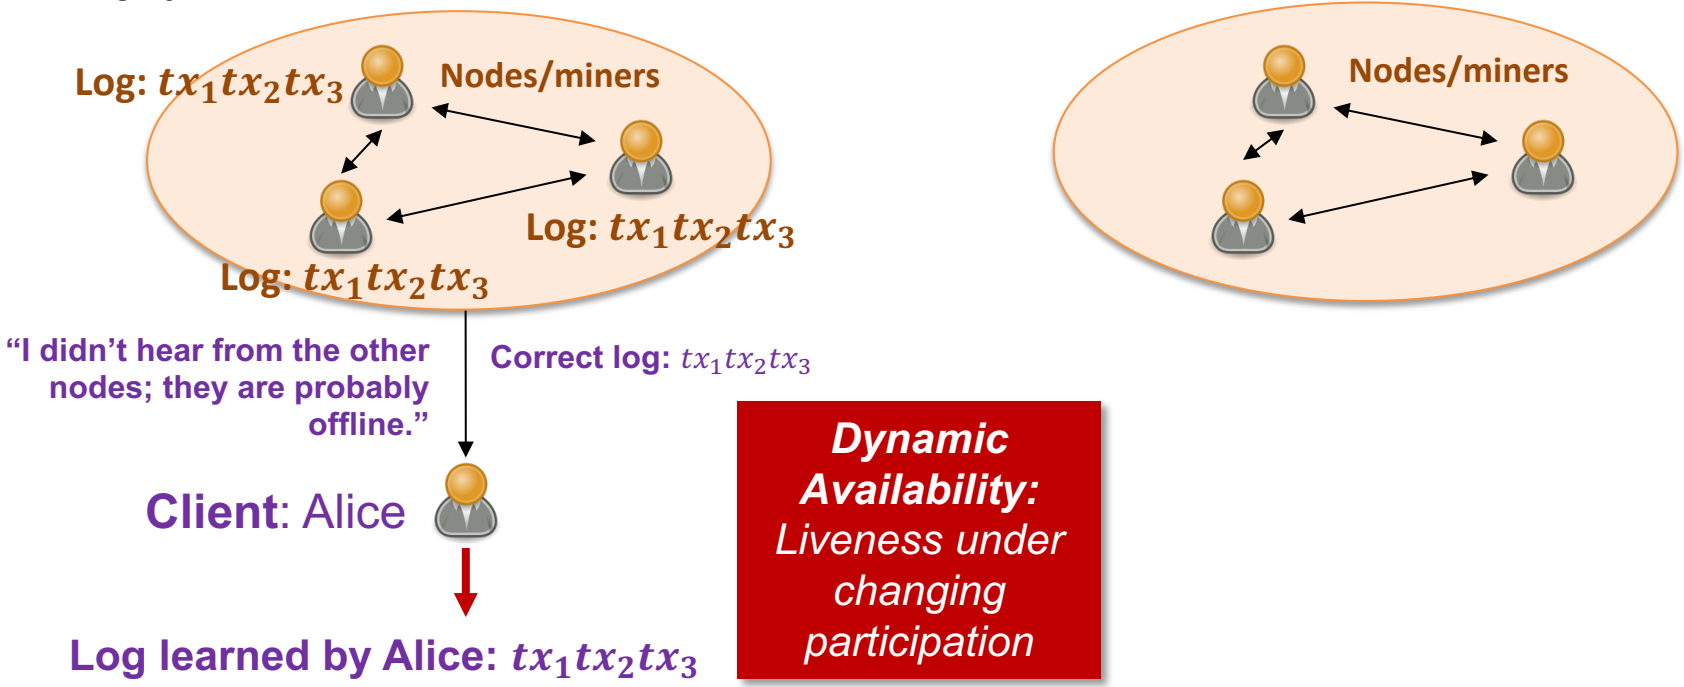


***Dynamic Availability:*** *Liveness under changing participation*

# Blockchain CAP Theorem

For contradiction, suppose our SMR protocol has both dynamic availability and finality.

**World 2**

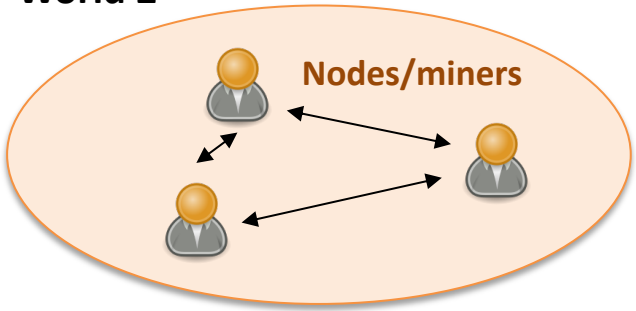


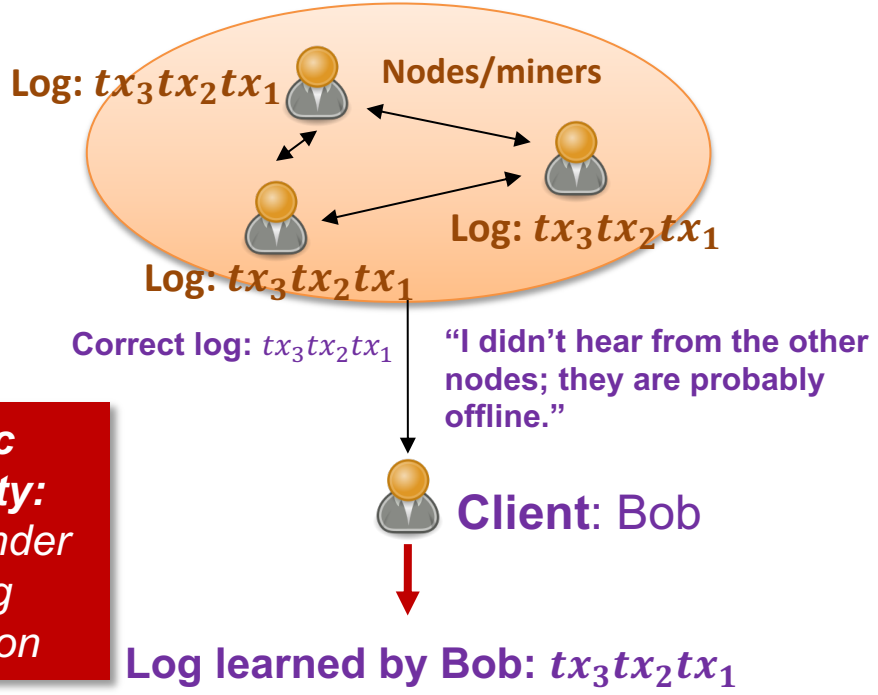


***Dynamic Availability:*** *Liveness under changing participation*

# Blockchain CAP Theorem

For contradiction, suppose our SMR protocol has both dynamic availability and finality.

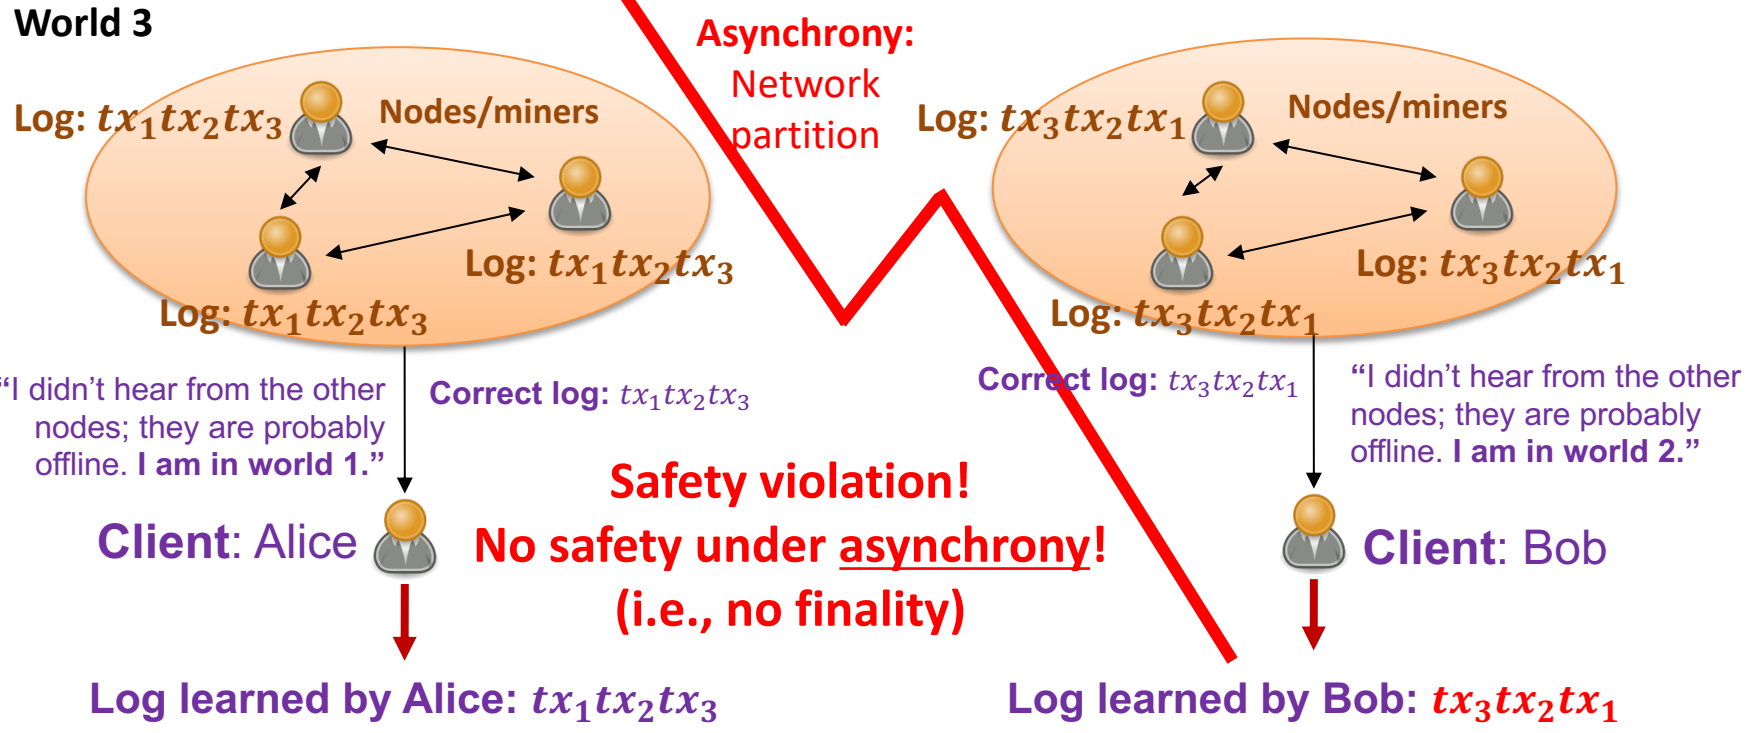


⇒ proves the CAP theorem: cannot have both dynamic availability and finality

# What to do: Nested Ledgers/Chains

Single chain: $tx_1$, $tx_2$, $tx_3$, …

**Impossible!** Due to the CAP Theorem!

- Finality: Safe under asynchrony
- Dynamic availability: Live under changing participation

## Accountable finalized chain

- **Prefix property:** Prefix of the available chain.
- Accountably safe under asynchrony.
- Live once the network becomes synchronous and if enough nodes are online.
- Not live under low participation.

## Available chain

- Safe and live under synchrony and changing participation.
- Not safe under asynchrony.

Ebb-and-Flow Protocols: A Resolution of the Availability-Finality Dilemma (2020)

# What to do: Nested Ledgers/Chains

## Accountable finalized chain

- **Prefix property:** Prefix of the available chain.
- Accountably safe under asynchrony.
- Live once the network becomes synchronous and if enough nodes are online.
- Not live under small participation.

## Available chain

- Safe and live under synchrony and dynamic participation.
- Not safe under asynchrony.

Nakamoto consensus $\Pi_{ava}$ →

PBFT $\Pi_{fin}$ →

**Safety-favoring client:** trusts acc. finalized chain

**Liveness-favoring client:** trusts available chain

Client chooses!

Can interact with each other thanks to the prefix property!!

Ebb-and-Flow Protocols: A Resolution of the Availability-Finality Dilemma (2020)

# What to do: Nested Ledgers/Chains

## Accountable finalized chain

- **Prefix property:** Prefix of the available chain.
- Accountably safe under asynchrony.
- Live once the network becomes synchronous and if enough nodes are online.
- Not live under small participation.

## Available chain

- Safe and live under synchrony and dynamic participation.
- Not safe under asynchrony.

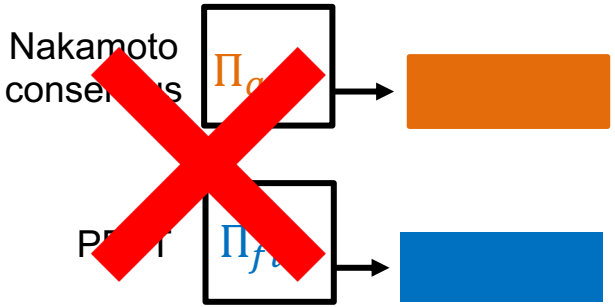


Ledgers can be inconsistent!
No prefix property!

**Safety-favoring client:** trusts acc. finalized chain

**Liveness-favoring client:** trusts available chain

Client chooses!

Can interact with each other thanks to the prefix property!!

Ebb-and-Flow Protocols: A Resolution of the Availability-Finality Dilemma (2020)

# What to do: Nested Ledgers/Chains

**Safety-favoring client:** trusts acc. finalized chain

**Liveness-favoring client:** trusts available chain

Client chooses!

- When the participation seems low at the weekend, it can either be that participation is actually low due to nodes taking time off or there is in fact a network partition.
- In this case, the boba vendor is willing to follow the available chain and risk a safety violation (and some double spend) due to a partition, since its transactions are of less value. By following the available chain, it can in turn keep selling boba at the weekends. Indeed, most of the time, there will not be a network partition, and participation will be low at the weekends due to nodes taking time off.
- However, the car vendor's transactions have large value, and the car vendor cannot afford even one double spend! Therefore, it will follow the accountable, finalized chain that never has safety violations, but stops when there is low participation, e.g., at the weekends. This is fine since the car vendor has few transactions and can afford to wait the weekend. Indeed, on Monday, the accountable, finalized chain regains its liveness with higher participation.

# How to obtain the nested chains?

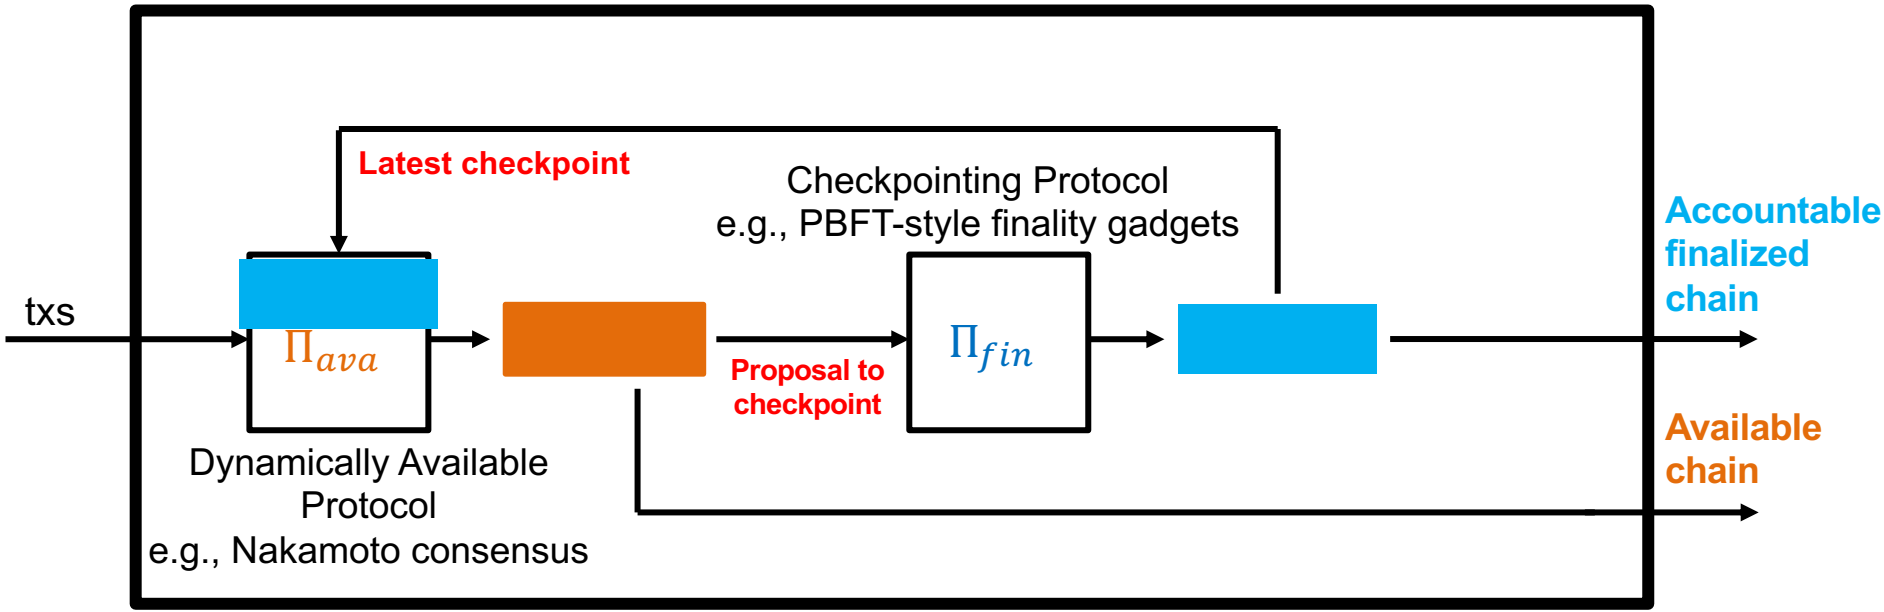


Combining GHOST and Casper. (2020)

# How to obtain the nested chains?

**Nested Chains**

Orange: available (full) chain

Blue: accountable, final (prefix) chain

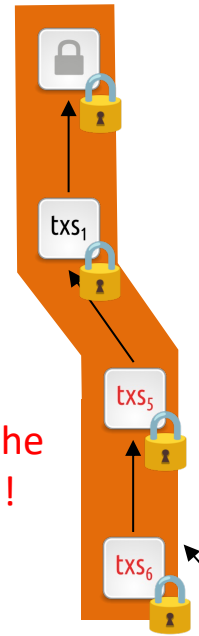


Always extend the last checkpoint!!

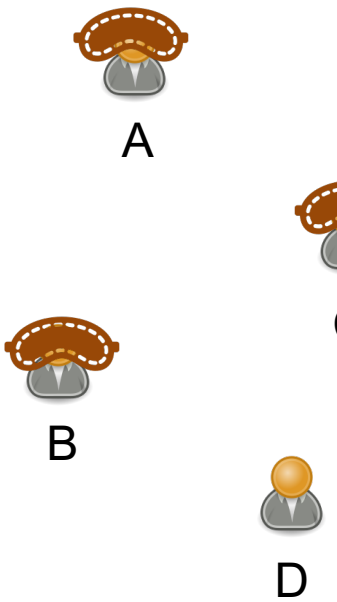


***Dynamic Availability:*** *Longest chain keeps growing.*

**Checkpointing Protocol**

Propose “txs5”

C votes “txs5”

B votes “txs5”

D votes “txs5”

Propose “txs6”

A votes “txs6”

C votes “txs6”

D votes “txs6”

***Finality:*** *Thanks to votes, checkpoints are safe even under asynchrony.*

# Ethereum

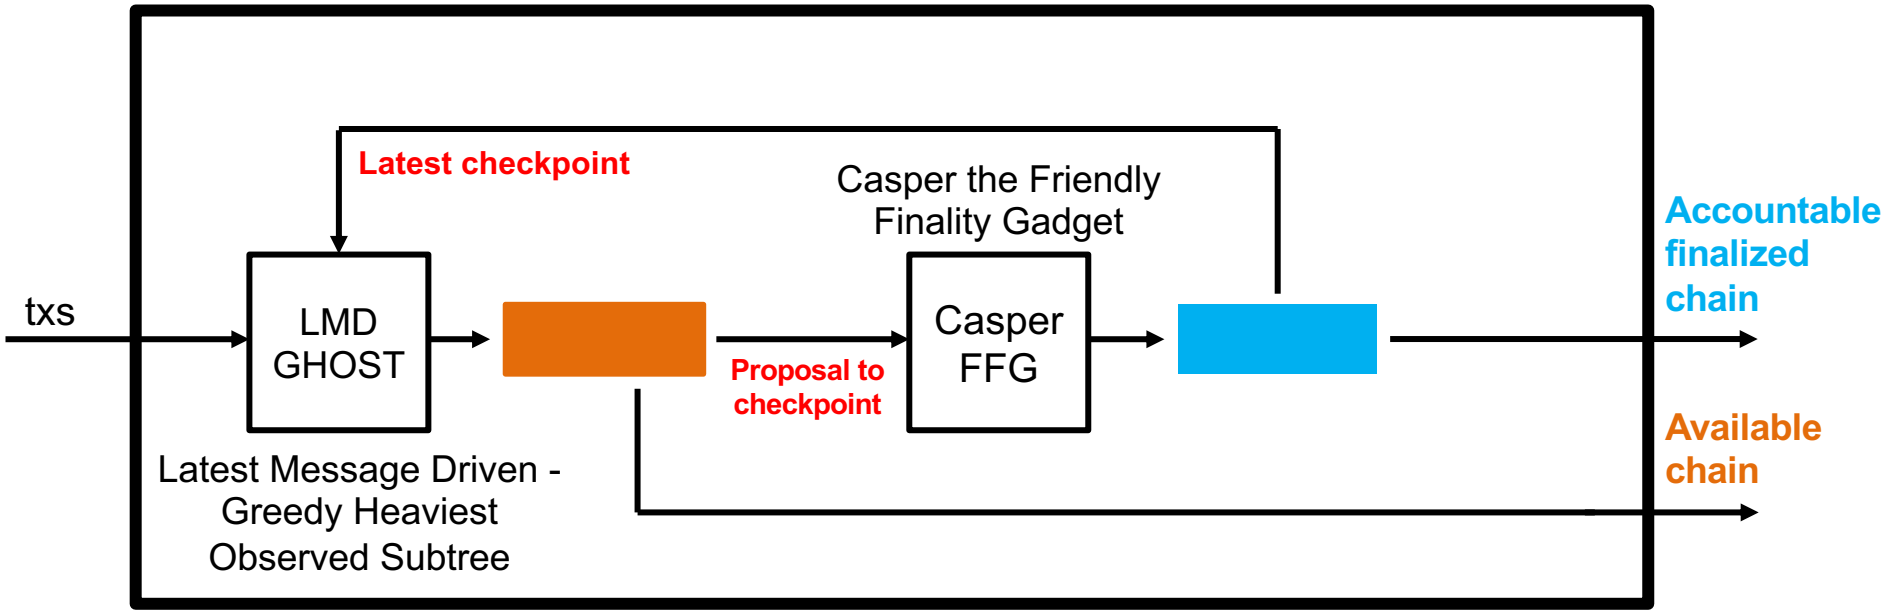


Combining GHOST and Casper. (2020)

# PoS Blockchains Consume Little Energy

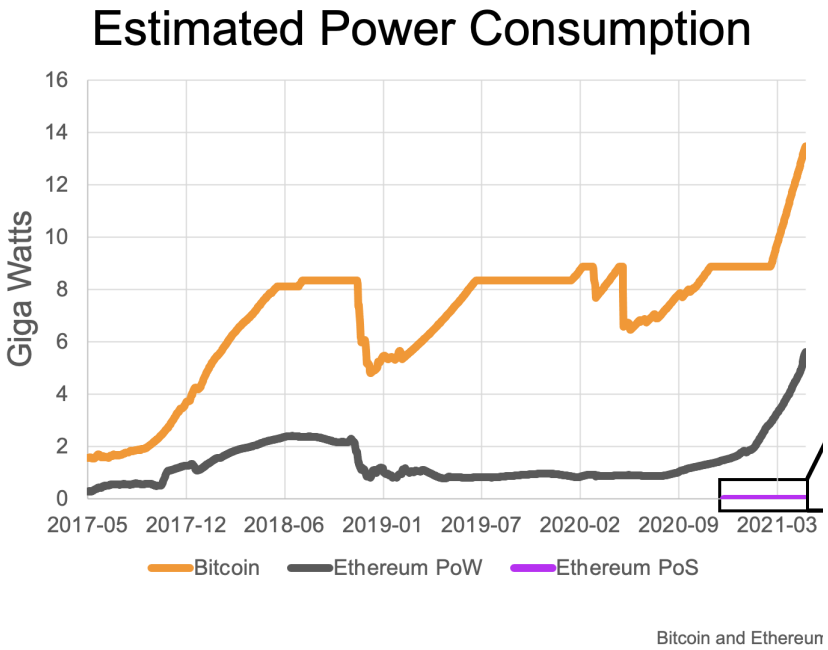


Taken from the article “Ethereum's energy usage will soon decrease by ~99.95%” that appeared at the ‘ethereum foundation blog’ on May 18th 2021.

# PoS Blockchains Consume Little Energy

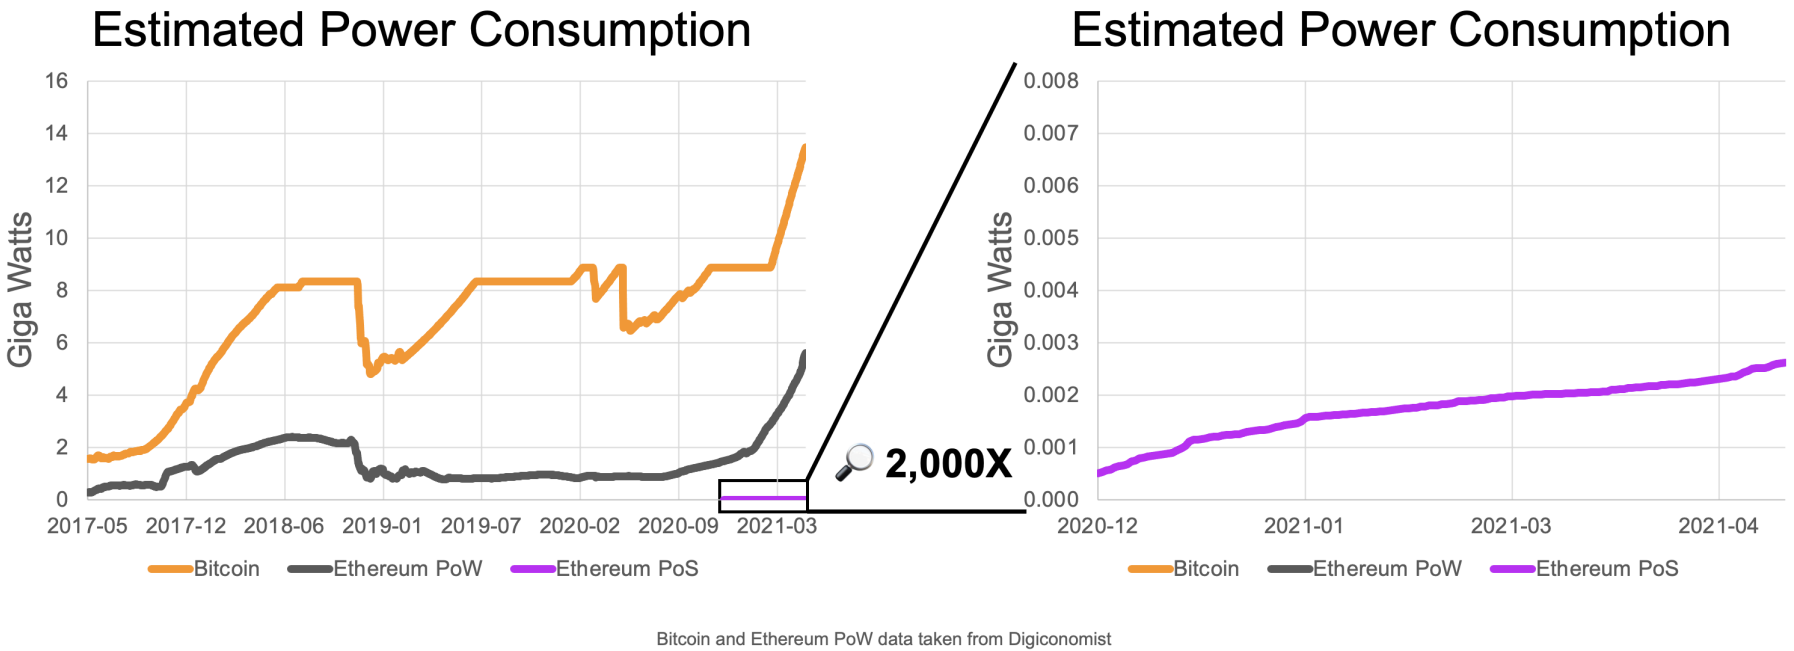


Bitcoin and Ethereum PoW data taken from Digiconomist

Taken from the article “Ethereum's energy usage will soon decrease by ~99.95%” that appeared at the ‘ethereum foundation blog’ on May 18th 2021.

# END OF LECTURE

Next lecture: the Ethereum execution layer

# *A Note on the Simple PoS Protocol

- This protocol is, in fact, **not secure**; because even though it satisfies safety, it does not satisfy liveness:
  - Suppose an adversarial epoch leader proposes two conflicting blocks and shows each block to different halves of the set of nodes.
  - In this case, each block gathers $\frac{1}{2}n$ votes, even though the quorum required for finality is $> \frac{2}{3}n$ votes. None of the blocks get finalized, and the protocol gets stuck.
- Resolving this situation requires a non-trivial improvement of the protocol, and is at the heart of PBFT, a secure SMR protocol, on which this simple protocol was based.
- The purpose of the simple (yet insecure) PoS protocol is to illustrate the core ideas in finalizing and accountably-safe SMR protocols, such as quorum intersection.
- Secure and modern PBFT-style protocols include Tendermint and HotStuff.

# Optional Slides

Slides going forward is optional material and investigate the Selfish Mining Attack.

# Selfish Mining Attack (Optional)

Attacker keeps its blocks private until sufficiently many honest blocks are mined.
It then publishes the hidden blocks to ‘reorg’ the honest blocks.

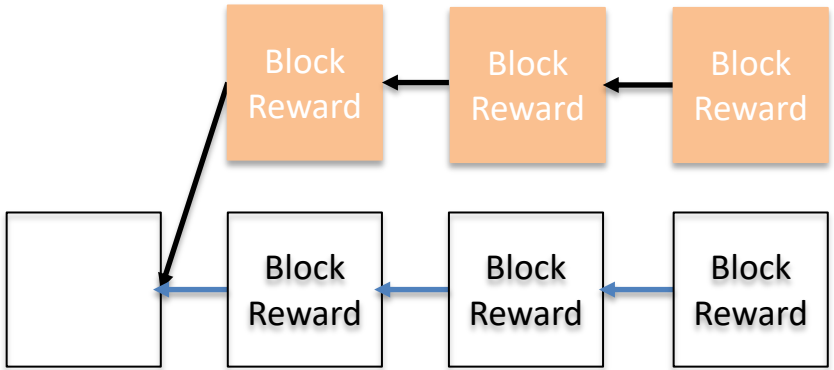


Majority is not Enough: Bitcoin Mining is Vulnerable (2013)

# Selfish Mining Attack (Optional)

Suppose you hold $\beta$ fraction of the mining power.

If you behave honestly, mining on the tip of the longest chain in your view and broadcasting your blocks as soon as they are mined…

You mine $\sim\beta$ fraction of the blocks.

You earn $\sim\beta$ fraction of the block rewards over Bitcoin's lifetime.

Note that the total amount of block rewards over Bitcoin's lifetime is fixed!

# Selfish Mining Attack (Optional)

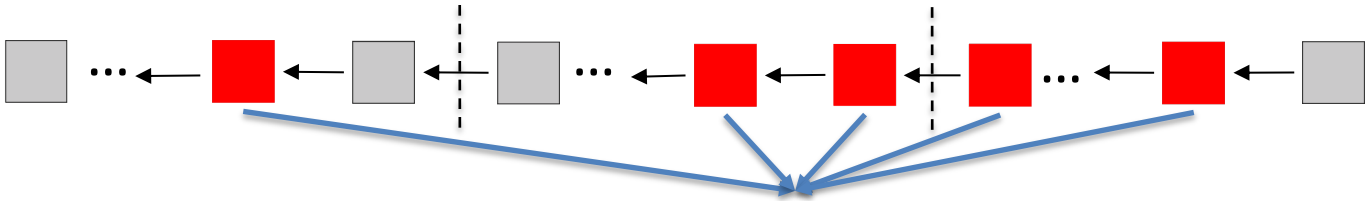

**$\beta$ fraction:** adversary's blocks

**Total fraction on the longest chain: 1**

**Remaining $1-\beta$ fraction:** honest miners' blocks

# Selfish Mining Attack (Optional)

If you do selfish mining…

You kick out $\sim\beta$ fraction of the mined blocks out of the longest chain.

$\sim 1-\beta$ fraction of the mined blocks are in the longest chain.

You have mined $\sim \frac{\beta}{1-\beta}$ of the blocks in the longest chain.

You earn $\sim \frac{\beta}{1-\beta} > \beta$ fraction of the block rewards over Bitcoin's lifetime!

# Selfish Mining Attack (Optional)

**$\beta$ fraction:** honest miners' blocks displaced by the adversary's blocks

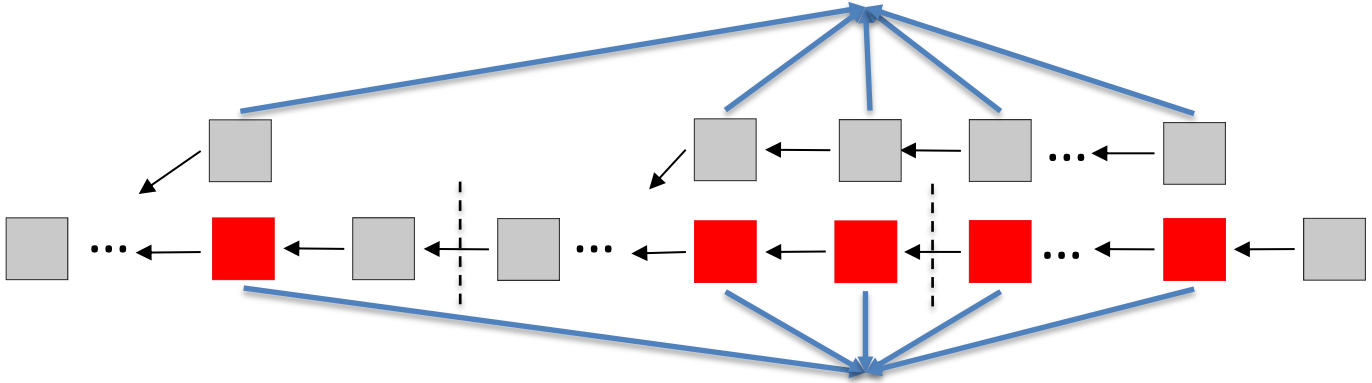

**$\beta$ fraction:** adversary's blocks

**Total fraction on the longest chain: $1-\beta$**

**Remaining $1-2\beta$ fraction:** honest miners' blocks that were not displaced by the adversary's blocks

# Selfish Mining Attack (Optional)

Chain quality (fraction of honest blocks in the longest chain) of Bitcoin $\leq \frac{1-2\beta}{1-\beta}$

Is it possible to make Bitcoin incentive compatible with chain quality to $\beta$?

Yes!

Examples: Fruitchains ($\varepsilon$-Nash equilibrium), Colordag ($\varepsilon$-sure Nash equilibrium)

Fruitchains: A Fair Blockchain (2017)
Colordag: An Incentive-Compatible Blockchain (2022)